


环保物料

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 650V AC/minute
Contact Resistance : 30mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -40°C~+85°C

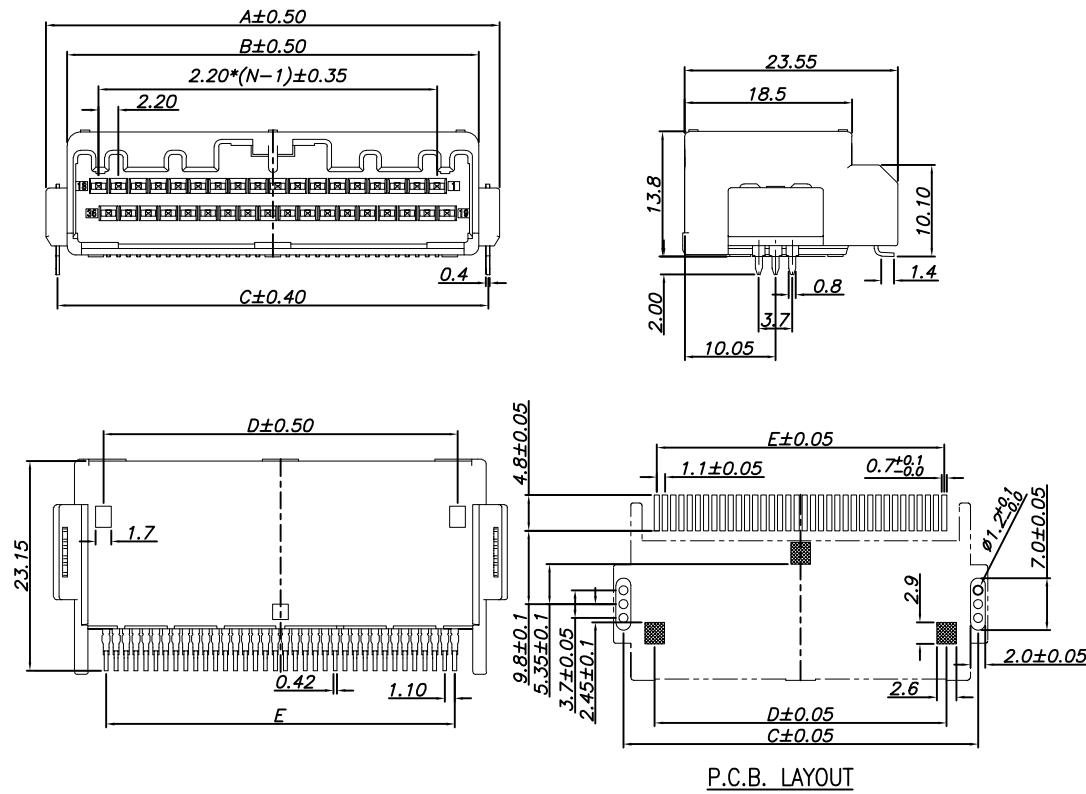

Dimensional Information:

Part No	Dimensions				
	A	B	C	D	E
2*6P	23.70	19.10	21.10	12.70	12.10
2*8P	28.10	23.50	25.50	17.10	16.50
2*10P	32.50	27.90	29.90	21.50	20.90
2*12P	36.90	32.30	34.30	25.90	25.30
2*14P	41.30	36.70	38.70	30.30	29.70
2*16P	45.70	41.10	43.10	34.70	34.10
2*18P	50.10	45.50	47.50	39.10	38.50
2*20P	54.50	49.90	51.90	43.50	42.90

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

 **康导新能源**
网址: www.dgonne.com 电话: 0768-8653377
邮箱: 2850175986@qq.com 传真: 0768-853822

TITLE:
2.20mm pitch Dual Wafer

PART. NO:		42202W90-2*NP*-A2-**	
DWG. NO:		ENDE05	
REV:	A0	SHEET:	1/1