
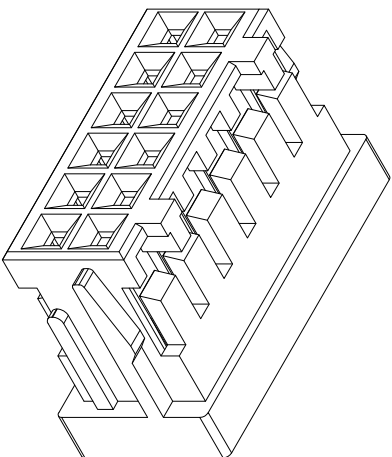
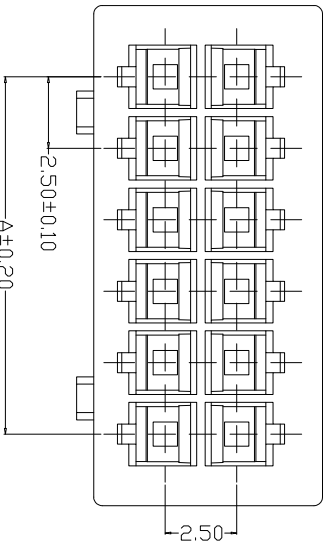
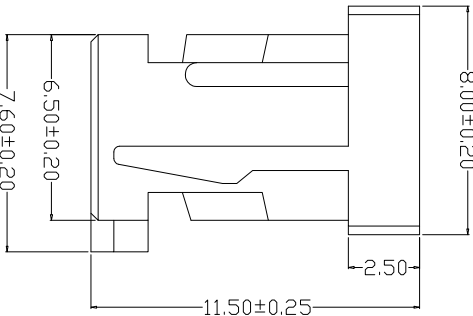
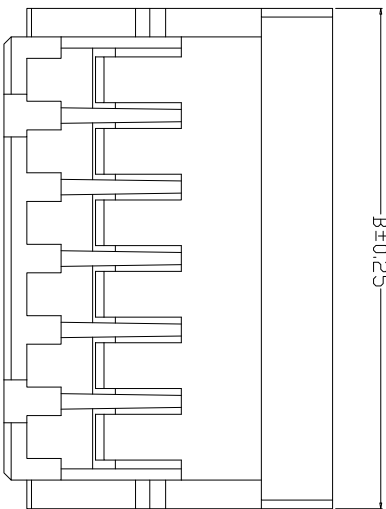


环保物料

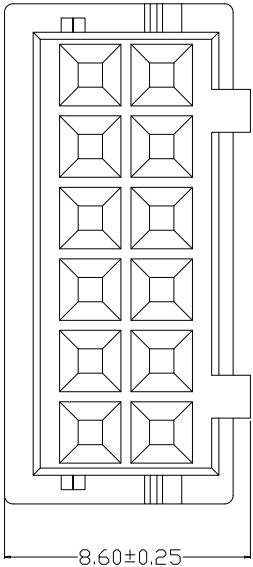

PIN	Dimensions	
	A	B
2*2P	2.50	7.50
2*3P	5.00	10.00
2*4P	7.50	12.50
2*5P	10.00	15.00
2*6P	12.50	17.50
2*7P	15.00	20.00
2*8P	17.50	22.50
2*9P	20.00	25.00
2*10P	22.50	27.50
2*11P	25.00	30.00
2*12P	27.50	32.50
2*20P	47.50	52.50

主要技术参数 Main Specifications

线 数 (Poles) : 04~24, 40
接触电阻 (Contact resistance) : $\leq 30m\Omega$
绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
额定电压 (Rated voltage) : 250V AC DC
额定电流 (Rated current) : 3.0A AC DC
耐 电 压 (Withstand Voltage): 800V AC/minute
温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

A5U2U						
A	HOUSING		1	PCS	PA66	COLOR: BEIGE
ITEM	COMPONENT		QTY		MATERIAL	FINISH



康 导 新 能 源

网址: www.dgsource.com 电话: 0789-85337833
邮箱: 2850173988@qq.com 传真: 0789-85392827

GENERAL TOLERANCES		SCALE:		NAME	DATE	TITLE:	2.50mm PITCH HOUSING	PART. NO:	22508Y		
LINEAR		ANGLES									
0.0±0.35		X° REF±6°		黎腾	2017.06.16	肖坤权	2017.06.16	DWG. NO:			
0.00±0.25		X° ±3°		肖坤权	2017.06.16						
0.000±0.15		X° X' ±2°		DRAWN	2017.06.16	2017.06.16		REV:	A0		
				DESIGNER							
				DATE				SHEET: 1/1			
				UNIT: MM							
				SIZE: A4							
				REVISION RECORD							
				2017.06.16							
				1							