
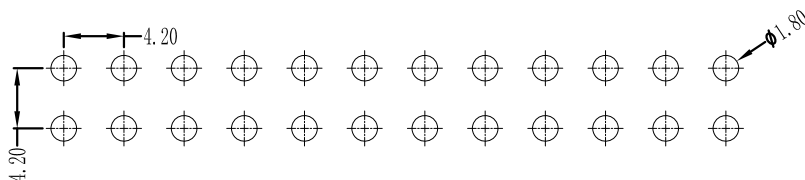
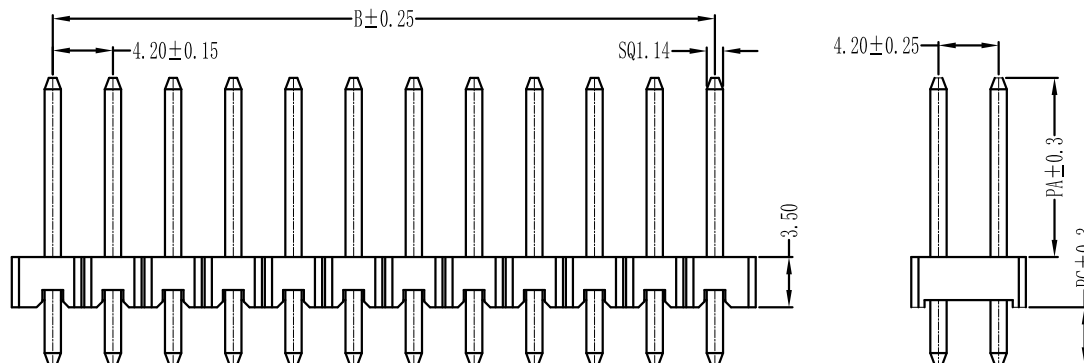


环保物料

Pin数	尺寸A	尺寸B
2×1	4.70	-
2×2	8.90	4.20
2×3	13.10	8.40
2×4	17.30	12.60
2×5	21.50	16.80
2×6	25.70	21.00
2×7	29.90	25.20
2×8	34.10	29.40
2×9	38.30	33.60
2×10	42.50	37.80
2×11	46.70	42.00
2×12	50.90	46.20
2×13	55.10	50.40
2×14	59.30	54.60
2×15	63.50	58.80
2×16	67.70	63.00
2×17	71.90	67.20
2×18	76.10	71.40
2×19	80.30	75.60
2×20	84.50	79.80

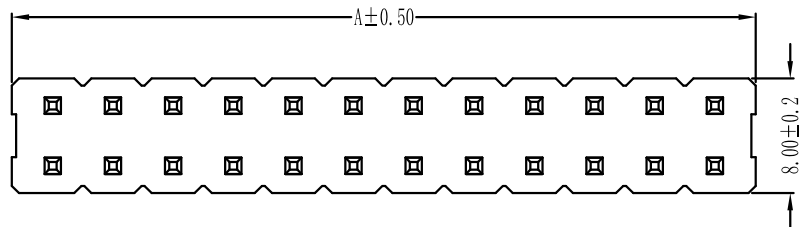

Specification:
 Current Rating : 7AMP
 Temperature Range : -40°C to $+105^{\circ}\text{C}$
 Contact Resistance : $20\text{m}\Omega$ Max
 Insulation Resistance : $1000\text{M}\Omega$ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard: PA9T/PBT
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

PCB LAYOUT

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 www.dgonne.com 电话: 0769-86337633 邮箱: 2850175986@qq.com 传真: 0769-86392827	PART. NO:		
LINEAR	ANGLES	1:1	黎腾	2022. 11. 3		KDPH-0126		
0.0 ± 0.25	$X^{\circ} \text{ REF} \pm 6^{\circ}$	APPROVED	肖坤权	2022. 11. 3		DWG. NO:		
0.00 ± 0.15	$X^{\circ} \pm 3^{\circ}$	DESIGNER	黄薇	2022. 11. 3		ENDE0126		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 ± 0.08	$X^{\circ} X' \pm 2^{\circ}$	DRAWN	REV: A0	SHEET: 1/1